


Versatile container semitrailer Grünwald

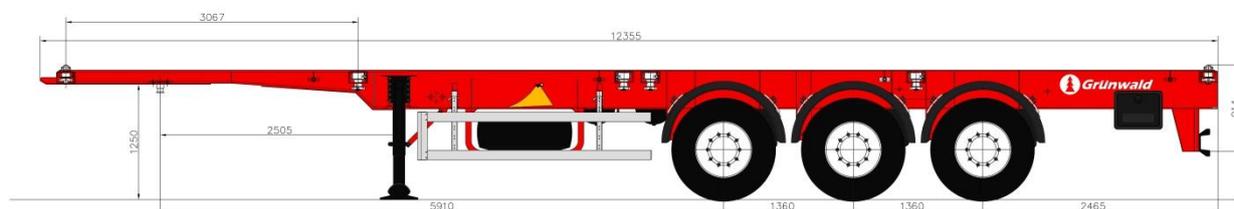

Advantages

- Designed together with German technicians.
- Reinforced frame.
- Original European component parts.
- Paint coating thickness of 200 micron for severe climatic conditions.
- Welding is fulfilled in the argon atmosphere that makes the welded joint to be resistant to low temperatures.

Technical features

Suspension	pneumatic	spring suspension
Axles	3x12000 kg	3x14000 kg
Fifth wheel load	15000 kg	15000 kg
Gross weight	51000 kg	57000 kg
Tare weight	6250 kg	6250 kg
Carrying capacity	44750 kg	50750 kg
Fifth wheel height	1250 mm	
Types of containers to be carried	20', 30', 40'	
Overall length	12355 mm	
Overall width	2500 mm	

Options

- Installation of the front lift axle.
- Installation of axles with disc brakes.
- Design according to the customer's request.
- SMARTBOARD information unit.
- Additional strengthening of the structure.

Warranty

- 12 months for the product.
- 36 months for axles.
- 5 years for axles if EBS BPW is installed.

Specifications

Chassis: Reinforced frame for rough road conditions. The side members made of Swedish steel OVAKO are welded from both sides and keep elasticity at low temperatures. JOST/Haakon landing gear. 12 fittings.

Types of containers: Suitable for transportation of all container types 1x20', 2x20', 1x30', 1x40'. The reinforced frame ensures carrying 2x20' containers.

Axles: BPW Heavy Duty axles with drum brakes. Pneumatic or spring suspension. Lifter for platform lifting/lowering.

Break system: EBS/ABS of Wabco/BPW production.

Tires and wheels: 13 wheels (including spare one). Galvanized steel wheel disks. Tires 315/80 R22,5 of brand at the semitrailer manufacturer's discretion.

Electrical system: Two-wire system, 24 V operating voltage, explosion-proof design, rear five-chamber lights with integrated trigonal reflector.

Optional equipment: Six complete mudguards. Side protector made of aluminum shape. Two wheel chocks with holders. Holder for two spare wheels. Tool box with a lock.